

AKUSTIK+ AMC Mecanocaucho

CEILING MOUNTS

Grand Akustik range




A-45 load from 40 to 100 kg

B-60 load from 80 to 150 kg

Range designed for suspension of false acoustic ceilings and machinery operating at more than 1.000 r.p.m. The same antivibration element is used for all the range. This element is made of rubber offering high mechanical performance and it is specially studied for vibratory insulation. The metallic structure is designed to resist loads up to 1000 Kg. It is supplied with an anticorrosive zinc-plated coat.



Dynamic behaviour

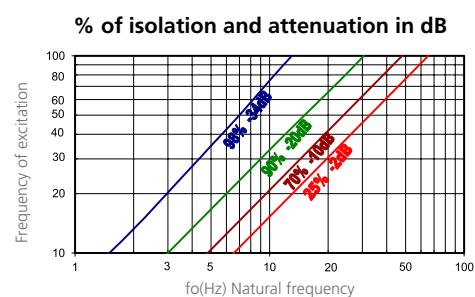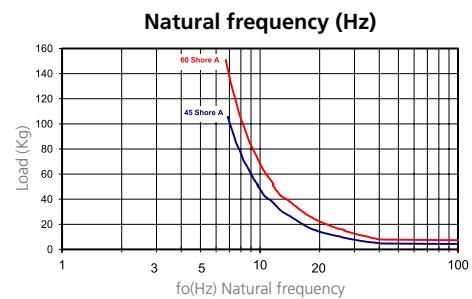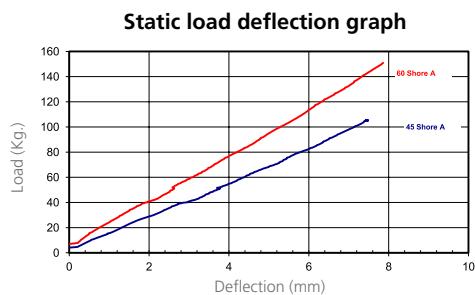

REF. AMC	LOAD	CODE
Grand Akustik 1 A-45	40-100 Kg.	23201
Grand Akustik 2 A-45	40-100 Kg.	23211
Grand Akustik 3 A-45	40-100 Kg.	23221
Grand Akustik 1 B-60	80-150 Kg.	23202
Grand Akustik 2 B-60	80-150 Kg.	23212
Grand Akustik 3 B-60	80-150 Kg.	23222



Grand Akustik 3



Grand Akustik 2



Example of installation