

# KINETICS™

## Isolation Hangers Model RH

### Description

Kinetics Model RH Vibration Isolation Hangers are designed to reduce the transmission of vibration and noise produced by suspended equipment, piping, and ductwork. RH Hangers incorporate a color-coded elastomer-in-shear insert with a load plate, assembled into a stamped or welded hanger bracket. Model RH hangers are a unique utilization of elastomer, loading the material in shear rather than compression, increasing allowable strain without accelerating deterioration. RH Hangers will allow support rod misalignment through a 30° arc. Isolation brackets will carry a 500% overload without failure. Hangers are available in deflections from 0.20" to 0.57" (5 mm to 15 mm) and in capacities up to 2,000 lbs (907 kg). RH Hangers may be selected where first cost must be minimized. Kinetics Model RH Hangers are recommended for the isolation of vibration produced by suspended mechanical equipment, in-line and exhaust fans, ductwork, piping, etc.



### Application

Kinetics Model RH hangers are used to isolate suspended sources of audible frequency vibration, or isolation of noise in piping and ductwork systems.

Model RH hangers are shipped fully assembled and ready for installation in threaded rod suspension systems.

Model RH hangers are available in a wide range of load selections and up to 0.57" (15 mm) static deflection and can be provided with labor-saving accessories for adaption to wire or strap suspension systems.

Hanger Type	Spring Color	Rated Capacity		Rated Deflection		W		L		H		A		B		C	
		lbs.	kg	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
RH-75A	Black	75	35	0.20	5	2.15	55	1.5	38	2.72	69	0.69	18	0.38	10	0.46	12
RH-125A	Black	125	57	0.20	5	2.15	55	1.5	38	2.72	69	0.69	18	0.38	10	0.46	12
RH-125B	Black	125	57	0.35	9	3.15	80	2.25	57	5.69	145	0.81	21	0.75	19	1.48	38
RH-175B	Red	175	79	0.35	9	3.15	80	2.25	57	5.69	145	0.81	21	0.75	19	1.48	38
RH-300B	Green	300	136	0.53	14	3.15	80	2.25	57	5.69	145	0.81	21	0.75	19	1.48	38
RH-450B	White	450	204	0.55	14	3.15	80	2.25	57	5.69	145	0.81	21	0.75	19	1.48	38
RH-700C	Purple	700	318	0.57	15	5.58	142	3.63	92	8.59	218	1.13	29	0.75	19	1.90	48
RH-1100C	Yellow	1100	499	0.64	16	5.58	142	3.63	92	8.59	218	1.13	29	0.75	19	1.90	48
RH-2000C	Pink	2000	907	0.53	14	5.58	142	3.63	92	8.59	218	1.13	29	0.75	19	1.90	48
RH-D-160	Red	160	73	0.40	15.9	3.15	80	2.25	57	5.91	150	-	-	-	-	-	-
RH-D-350	Green	350	159	0.40	15.9	3.15	80	2.25	57	5.91	150	-	-	-	-	-	-
RH-D-550	White	550	249	0.40	15.9	3.15	80	2.25	57	5.91	150	-	-	-	-	-	-

## Specifications

Vibration isolators with maximum static deflection requirements under operating load conditions not exceeding 0.57" (15 mm) shall be hangers consisting of an elastomer-in-shear insert encased in a welded steel bracket and provided with a stamped load-transfer cap.

The elastomer insert shall be molded from oil resistant compounds, shall be color coded to indicate load capacity and selected to operate within its published load range.


The hanger bracket shall be designed to carry a 500% overload without failure and to allow support rod misalignment through a 30° arc without metal-to-metal contact or other short circuit.

Isolation hangers shall be selected by the manufacturer for each specific application to comply with deflection requirements as shown on the Vibration Isolation Schedule or as indicated on the project documents.

Vibration isolation hanger assembly shall be Model RH, as manufactured by Kinetics Noise Control, Inc.

## Features

- Elastomer-in-shear noise isolator
- Static deflections up to 0.57" (15 mm)
- Load capacities up to 2000 lbs. (907 kg)
- Insert color coded for load capacity
- 500% overload fail-safe steel bracket
- 30° allowable rod misalignment bracket design

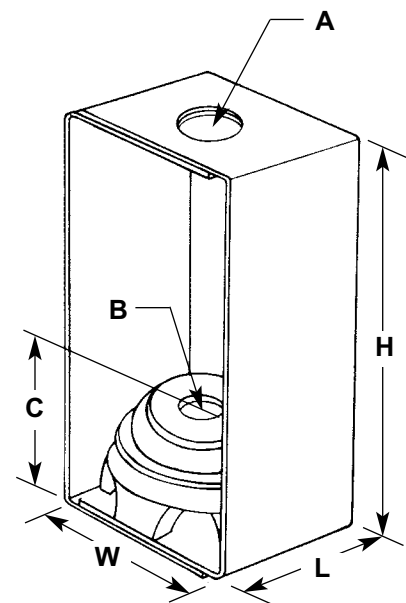

<b>United States</b>	<b>Canada</b>
6300 Irelan Place	1720 Meyerside Drive
P.O. Box 655	Mississauga, Ontario
Dublin, Ohio 43017	L5T 1A3
Phone: 614-889-0480	Phone: 905-670-4922
Fax: 614-889-0540	Fax: 905-670-1698

[www.kineticsnoise.com](http://www.kineticsnoise.com)  
[sales@kineticsnoise.com](mailto:sales@kineticsnoise.com)

Kinetics Noise Control, Inc. is continually upgrading the quality of our products. We reserve the right to make changes to this and all products without notice.